

FCS-MG-Z800-1

SMA Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~18GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical


RF Connector: SMA Male
Mating Cable: FZ800
Outer Conductor: Passivated Stainless Steel
Inner Conductor: Gold Plated Brass

How To Order

FCS-MG-Z800-1

Customization is available upon request.

Outline Drawings

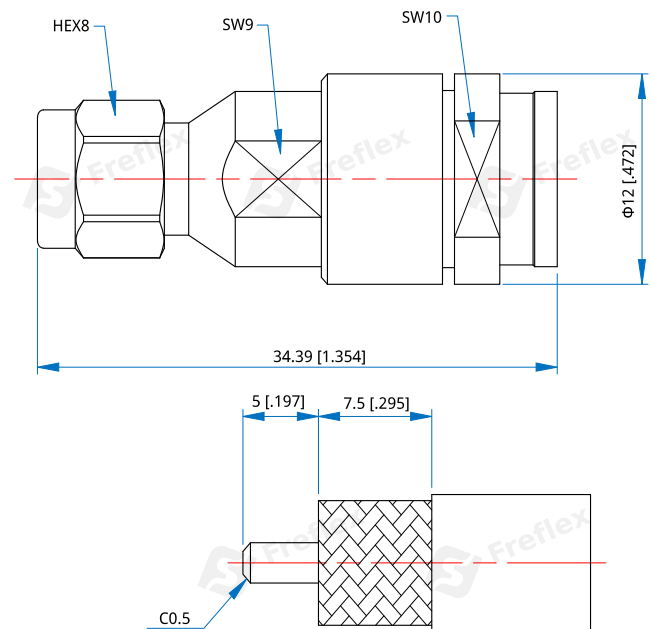

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]