

FCS-MRG-A400-2

SMA Male Right Angle

Features: * Low VSWR Applications: * Wireless

* Radar

* Instruments

* Electronics

Electrical

Frequency: DC ~ 26.5GHz VSWR: 1.35 max. Impedance: 50Ω

Mechanical

RF Connector: SMA male right angle

Mating Cable: FA400

Outer Conductor: Passivated stainless steel

Inner Conductor: Gold plated brass


> 48H Saltspray:

How To Order

FCS-MRG-A400-2

Customization is available upon request.

Outline Drawings

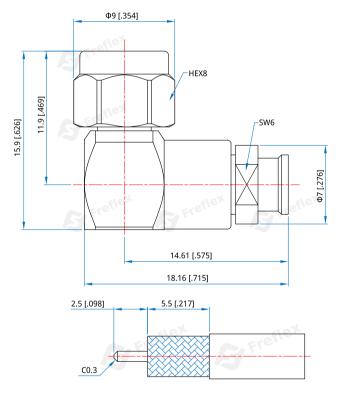

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Rev 1.1 Freflex Inc. www.freflex.com sales@freflex.com