


## FCS-MRG-A800-1

### SMA Male Right Angle

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



#### Electrical

Frequency: DC~18GHz  
VSWR: 1.35 max.  
Impedance: 50Ω

#### Mechanical


RF Connector: SMA male right angle  
Mating Cable: FA800  
Outer Conductor: Passivated stainless steel  
Inner Conductor: Gold plated brass or Gold plated beryllium copper

#### How To Order

**FCS-MRG-A800-1**

Customization is available upon request.

#### Outline Drawings

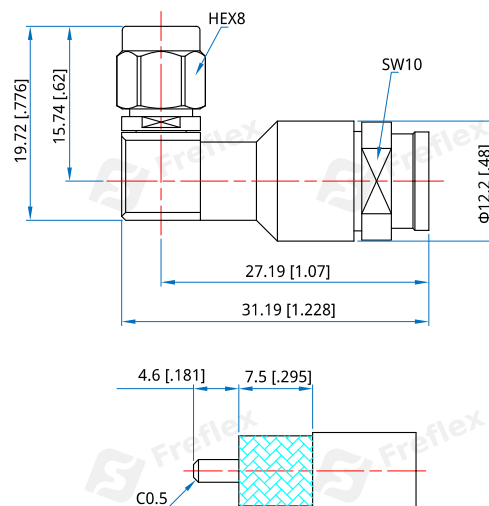

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]