

## FCS-MRG-T50-1

### SMA Male Right Angle

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

|                          |               |
|--------------------------|---------------|
| Frequency:               | DC~26.5GHz    |
| VSWR:                    | 1.25 max.     |
| Impedance of Dielectric: | 5000MΩ min.   |
| Voltage Withstand:       | 1000Vrms min. |
| Impedance:               | 50Ω           |

#### Mechanical


|                  |                            |
|------------------|----------------------------|
| RF Connector:    | SMA male right angle       |
| Mating Cable:    | FT50                       |
| Outer Conductor: | Passivated stainless steel |

#### How To Order

##### FCS-MRG-T50-1

Customization is available upon request.

#### Outline Drawings

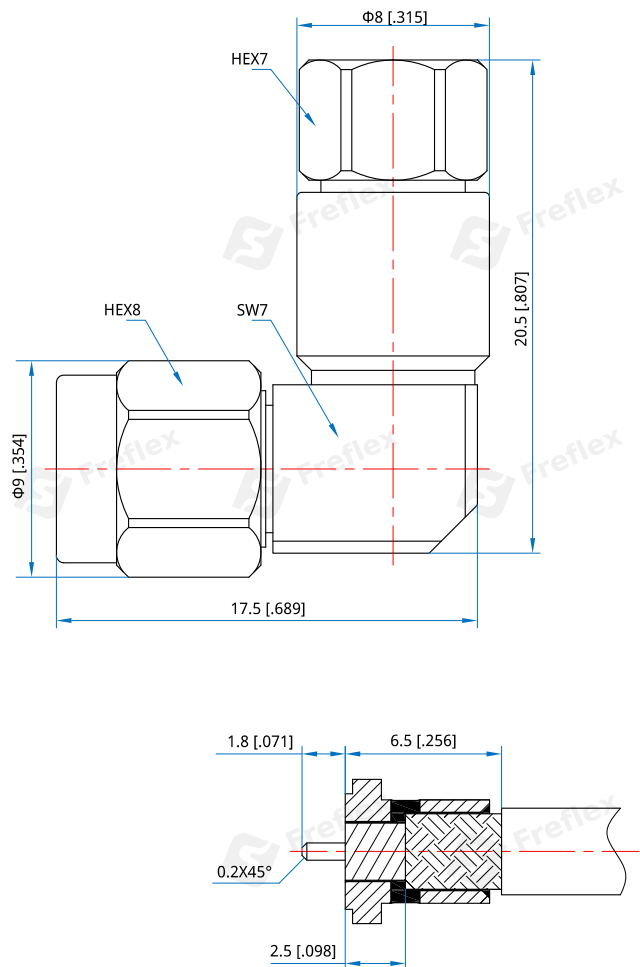

Unit: mm [in]  
Tolerance:  $\pm 0.5\text{mm}$  [ $\pm 0.02\text{in}$ ]