

FCSI-MB-086-1

SBMA Male

Features:

* Low VSWR

Applications:

* Wireless
* Radar
* Instruments
* Electronics

Electrical

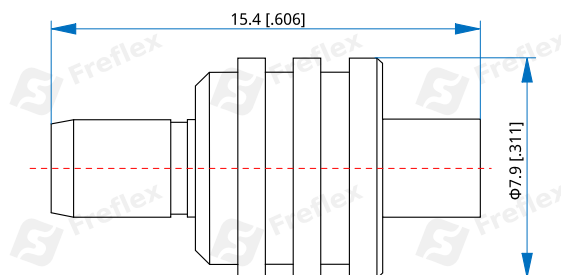
Frequency:	DC~6GHz
VSWR:	1.2 max.
Impedance of Dielectric:	5000M Ω min.
Voltage Withstand:	500V
Impedance:	50 Ω

Mechanical

RF Connector:	SBMA male
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass
Mating Cable:	FH280, FE086, FD086, RG316

Environmental

Temperature:	-55~+125°C
--------------	------------

Outline Drawings


Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order
FCSI-MB-086-1

Customization is available upon request.