

FCT-FG-A500-1

TNC Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~18GHz
VSWR: 1.35 max.

Mechanical


RF Connector: TNC female
Mating Cable: QA500, QA480, CXN3449
Outer Conductor: Passivated Stainless Steel
Inner Conductor: Gold plated beryllium copper

How To Order

FCT-FG-A500-1

Customization is available upon request.

Outline Drawings

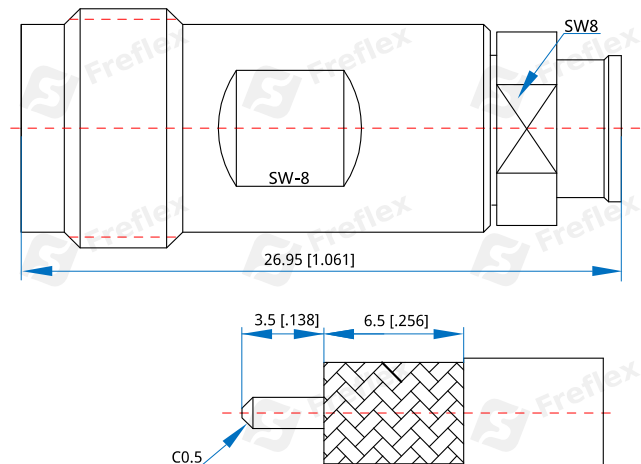

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]