

## FCT-MCB-R1000-1

### TNC Male, Crimp

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

Frequency: DC~4GHz  
VSWR: 1.2 max. DC~3GHz  
Impedance: 50Ω


#### Mechanical

RF Connector: TNC male  
Mating Cable: FR1000  
Outer Conductor: Ternary alloy plated brass & Nickel plated brass  
Inner Conductor: Gold plated phosphor bronze  
Dielectric: PTFE

#### Environmental

Temperature: -45~+125°C

#### Outline Drawings

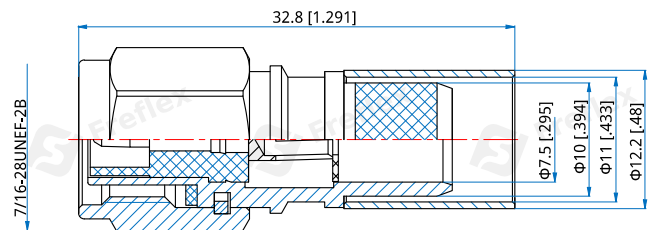

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]

#### How To Order

**FCT-MCB-R1000-1**

Customization is available upon request.