

FCW-MCB-316-1

SSMC Male Crimp

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics


Electrical

Frequency:	DC-6GHz
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	750V DC
Impedance:	50Ω

Mechanical

RF Connector:	SSMC male
Mating Cable:	RG316
Body:	Gold Plated Brass
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

Outline Drawings

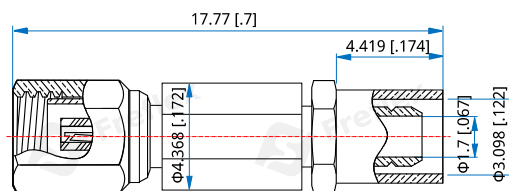

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FCW-MCB-316-1

Customization is available upon request.