

FCX-FB-086-1

MMCX Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics


Electrical

Frequency:	DC~3GHz
VSWR:	1.2 max.
Impedance of Dielectric:	5000M Ω min.
Voltage Withstand:	500V DC min
Impedance:	50 Ω

Mechanical

RF Connector:	MMCX Female
Mating Cable:	FH280, FD086, FE086, RG316, RG316D
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Innerr Conductor:	Gold plated brass

Outline Drawings

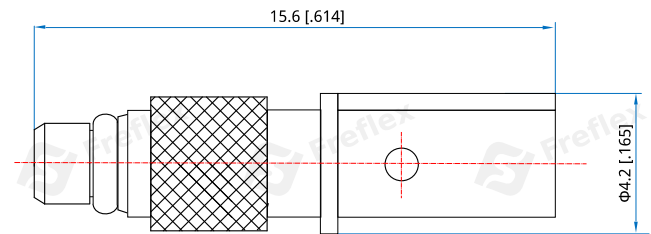

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

FCX-FB-086-1

Customization is available upon request.