

FAM1-22-P

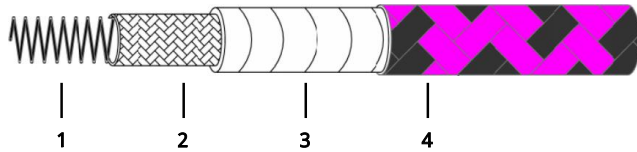
Long Flex Life

Features:

- * Long Flex Life
- * High Durable

Applications:

- * Laboratory Test
- * Satellite Communication

Construction


No.	Name	Size (mm)	Material
1	Spring	3.0±0.1	Stainless Steel Strap
2	Outer Conductor	3.35±0.1	Tin Plated Braid
3	Inner Jacket	3.6±0.1	PTFE
4	Jacket	4.7±0.15	PTFE

Environmental

Temperature:	-40~+80°C
Water Proof:	No
Oil Proof:	No

Mechanical

Bend Radius (installation):	30mm
Bend Radius (repeated):	80mm
Spring Spiral Direction:	Right
Spring Zero Load Pitch:	1.0~1.5mm
Spring Wire Size:	1.5±0.15*0.4±0.01mm
Spring Inner Diameter:	2.20±0.1mm
Outer Conductor Coverage	90% min.
Rate:	
Inner Jacket Color:	White
Jacket Color:	Purple and Black

How To Order

FAM0-22-P-X

X: Length in meters

Examples:

To order a FAM1-22-P RF cable armor, 0.5 meter, specify FAM1-22-P-0.5.