

FWCK-22

WR-22, 32.9~50.1GHz

Features:

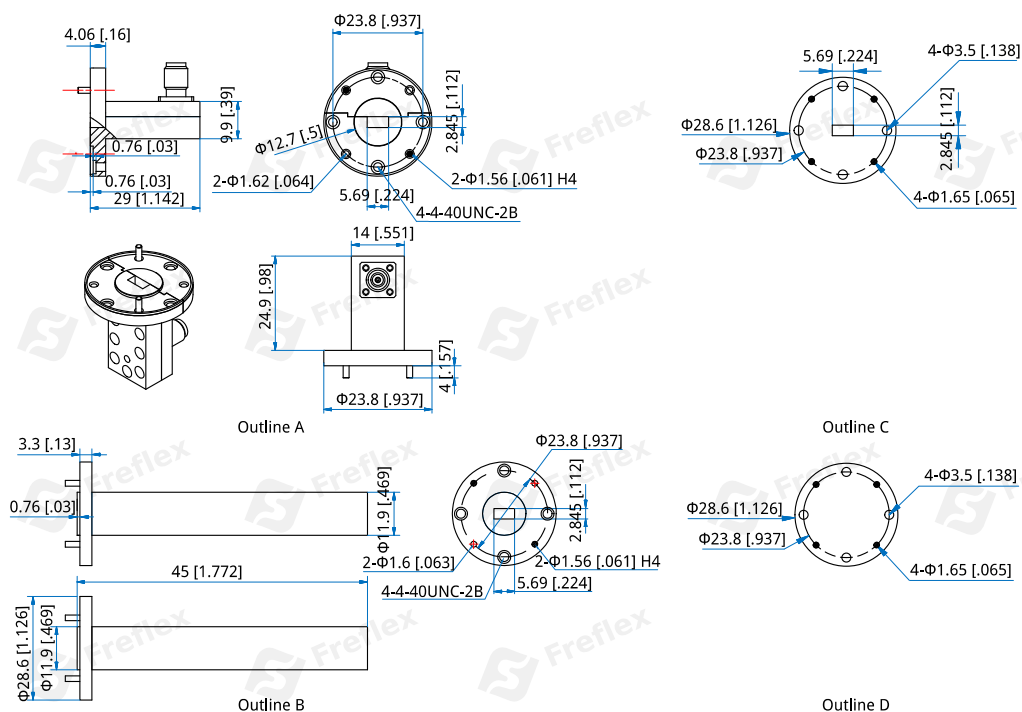
- * Broad Band
- * Low VSWR

Applications:

- * Calibration
- * Laboratory Test

Components

Part Number	Frequency (GHz)	VSWR (Max.)	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
QWCA-22-2F-R-5	32.9~50.1	1.2	Waveguide to coax adapter, WR-22 (BJ400) to 2.4mm(f), right angle, UG-383/U	Brass	Gold-plating	-	2	Outline A
QWT22-5-B-5	32.9~50.1	1.05	Low power waveguide termination, WR-22 (BJ400), 5W, UG-383/U	Brass	Pickling passivation	Gray paint	1	Outline B
QWS22-C-15	32.9~50.1	-	Waveguide short, WR-22 (BJ400), 3.3mm, UG-383/U	Brass	-	-	1	Outline D
QWSS22-3.3-C-15	32.9~50.1	-	1/4λ Waveguide straight section, WR-22 (BJ400), 3.3mm, UG-383/U	Brass	-	-	1	Outline C
Storage Box			Aluminum Alloy				1	-
Screw							1 set	-

Outline Drawings


Unit: mm [in] Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

Environmental

Operating Temperature: $-40\sim+85^{\circ}\text{C}$

Non-operating Temperature: $-50\sim+85^{\circ}\text{C}$

How To Order

FWCK-22 All the 5 components in one box.