

FWCK-284

WR-284, 2.6~3.95GHz

Features:

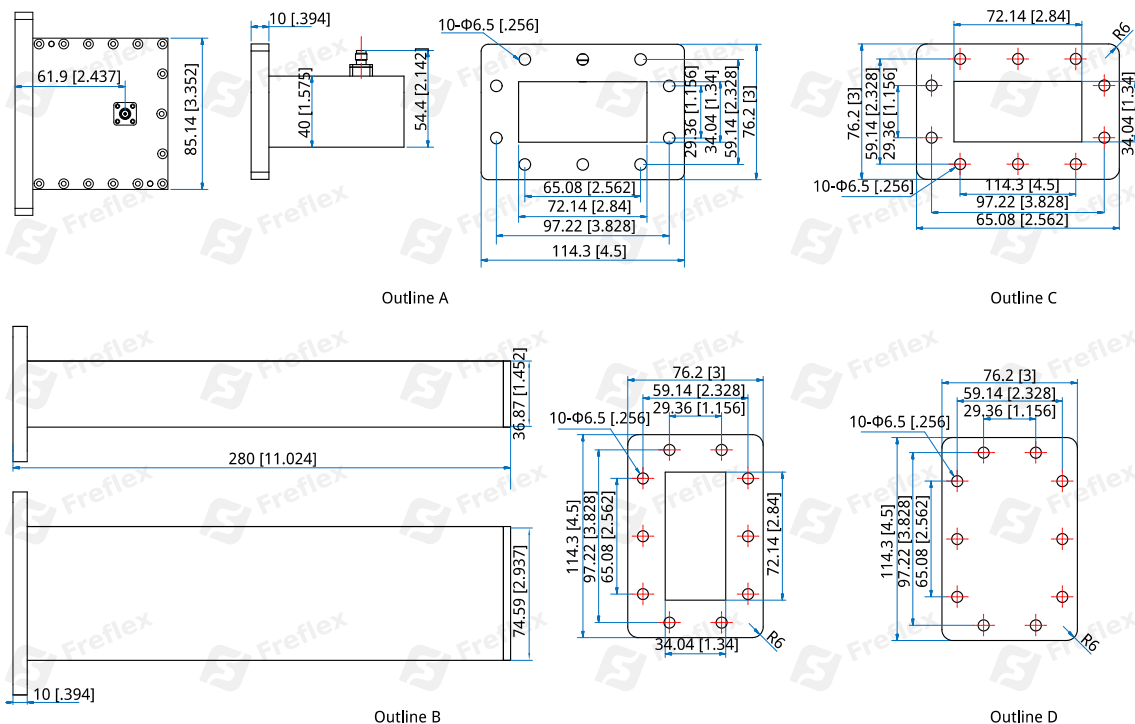
- * Broad Band
- * Low VSWR

Applications:

- * Calibration
- * Laboratory Test

Components

Part Number	Frequency (GHz)	VSWR (Max.)	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
FWCA-284-SF-R-2	2.6~3.95	1.2	Waveguide to coax adapter, WR-284 (BJ32) to SMA(f), right angle, FDP32	Aluminium	Conductive oxidation	Sea gray	2	Outline A
FWT284-10-A-2	2.6~3.95	1.03	Low power waveguide termination, WR-284 (BJ32), 10W, FDP32	Aluminium	Conductive oxidation	Sea gray	1	Outline B
FWS284-A-2	2.6~3.95	-	Waveguide short, WR-284 (BJ32), 12mm, FDP32	Aluminium	-	-	1	Outline D
FWSS284-30.44-A-2	2.6~3.95	-	1/4λ Waveguide straight section, WR-284 (BJ32), 30.44mm, FDP32	Aluminium	-	-	1	Outline C
Storage Box	Aluminum Alloy						1	-
Screw							1 set	-

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Environmental

Operating Temperature: -40~+85°C

Non-operating Temperature: -50~+80°C

How To Order**FWCK-284** All the 5 components in one box.