

FWCK-650

WR-650, 1.13~1.73GHz

Features:

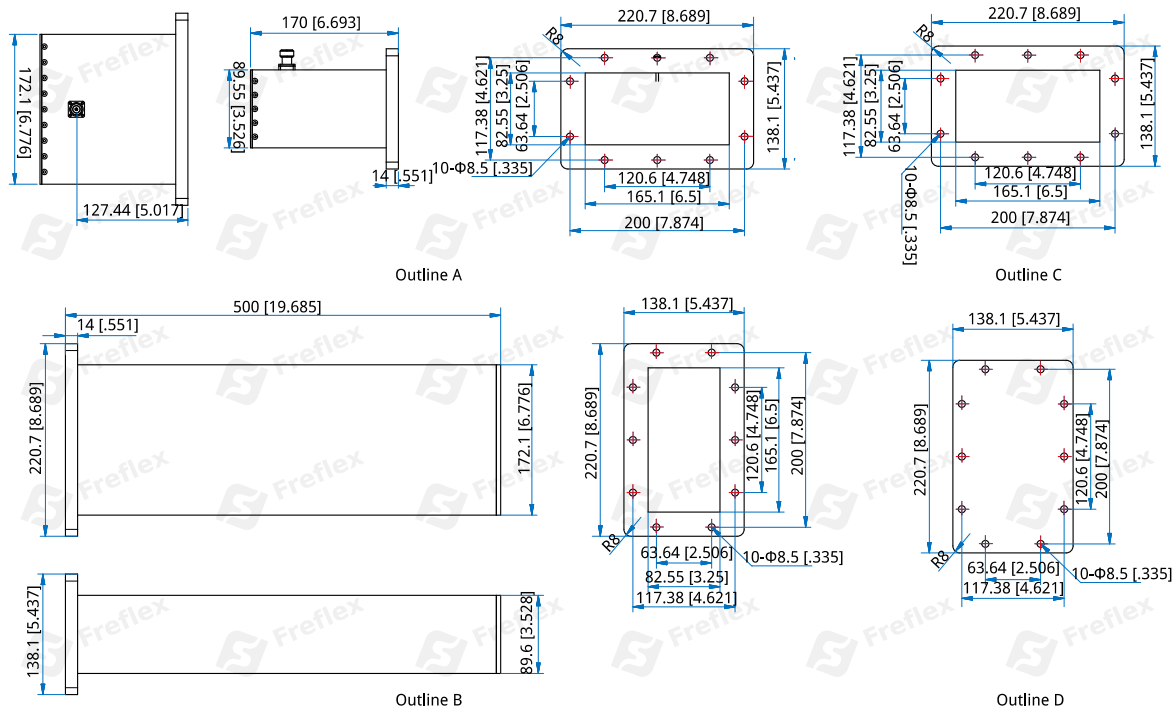
- * Broad Band
- * Low VSWR

Applications:

- * Calibration
- * Laboratory Test

Components

Part Number	Frequency (GHz)	VSWR (Max.)	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
FWCA-650-NF-R-2	1.13~1.73	1.2	Waveguide to coax adapter, WR-650 (BJ14) to N(f), right angle, FDP14	Aluminium	Conductive oxidation	Sea gray	2	Outline A
FWT650-25-A-2	1.13~1.73	1.04	Low power waveguide termination, WR-650 (BJ14), 25W, FDP14	Aluminium	Conductive oxidation	Sea gray	1	Outline B
FWS650-A-2	1.13~1.73	-	Waveguide short, WR-650 (BJ14), 12mm, FDP14	Aluminium	-	-	1	Outline D
FWSS650-69.86-A-2	1.13~1.73	-	1/4λ Waveguide straight section, WR-650 (BJ14), 69.86mm, FDP14	Aluminium	-	-	1	Outline C
Storage Box	Aluminum Alloy						1	-
Screw							1 set	-

Outline Drawings


Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

Environmental

Operating Temperature: -40~+85°C

Non-operating Temperature: -50~+80°C

How To Order

FWCK-650 All the 5 components in one box.