

FWCK-975

WR-975, 0.76~1.15GHz

Features:

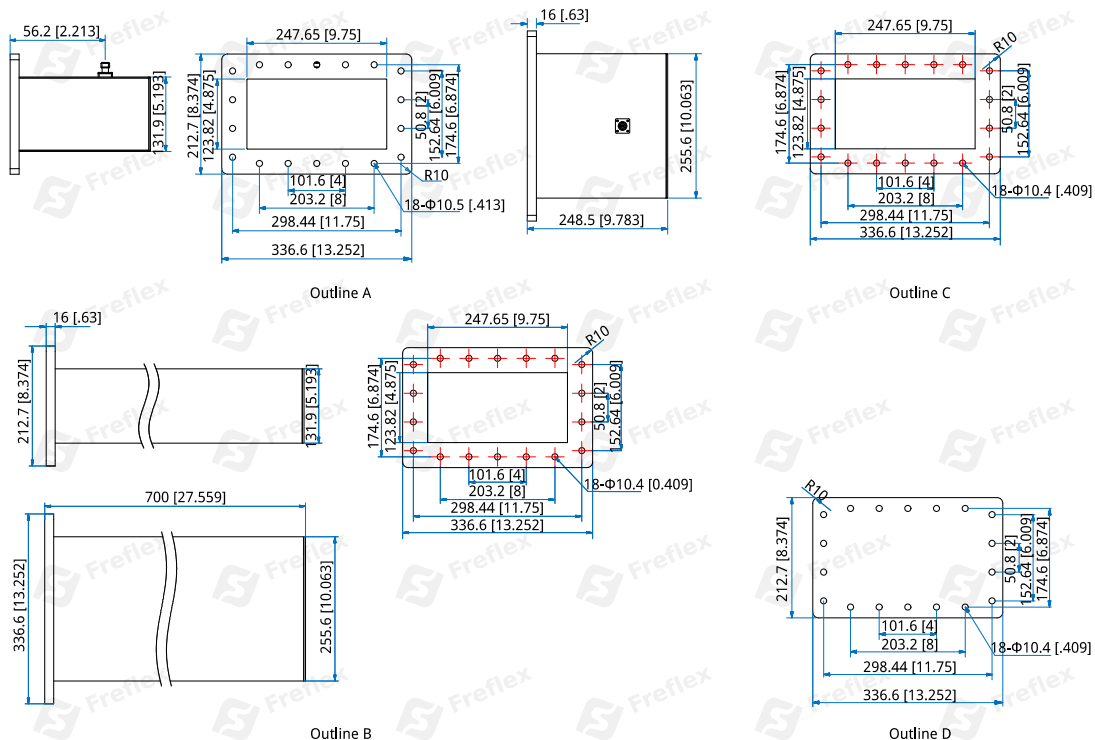
- * Broad Band
- * Low VSWR

Applications:

- * Calibration
- * Laboratory Test

Components

Part Number	Frequency (GHz)	VSWR (Max.)	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
FWCA-975-NF-R-2	0.76~1.15	1.2	Waveguide to coax adapter, WR-975 (BJ9) to N(f), right angle, FDP9	Aluminium	Conductive oxidation	Sea gray	2	Outline A
FWT975-25-A-2	0.76~1.15	1.04	Low power waveguide termination, WR-975 (BJ9), 25W, FDP9	Aluminium	Conductive oxidation	Sea gray	1	Outline B
FWS975-A-2	0.76~1.15	-	Waveguide short, WR-975 (BJ9), 15mm, FDP9	Aluminium	-	-	1	Outline D
FWSS975-104.61-A-2	0.76~1.15	-	1/4λ Waveguide straight section, WR-975 (BJ9), 104.61mm, FDP9	Aluminium	-	-	1	Outline C
Storage Box			Aluminum Alloy				1	-
Screw							1 set	-

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Environmental

Operating Temperature: -40~+85°C

Non-operating Temperature: -50~+80°C

How To Order**FWCK-975** All the 5 components in one box.