

## FA22

2.4mm to 2.4mm

**Features:**  
\* Low VSWR

**Applications:**  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: DC~50GHz  
VSWR: 1.25 max.  
Impedance: 50Ω


### Mechanical

RF Connectors: 2.4mm  
Mating Life Cycle: 500 cycles  
Outer Conductor: Passivated stainless steel  
Dielectric: PEI  
Inner Conductor: Gold plated beryllium copper or gold plated brass

### Environmental

Temperature: -60~+165°C

### Outline Drawings

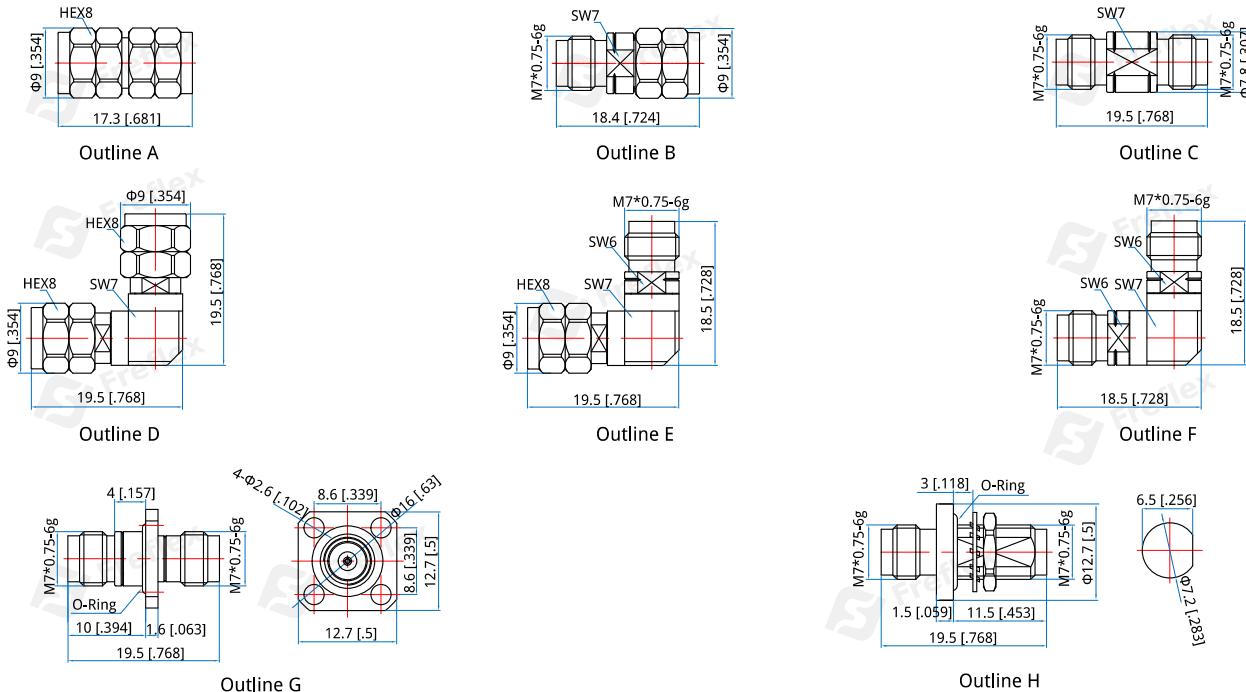

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]