

FA5V

1.35mm to 1.85mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~67GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical

RF Connectors: 1.35mm
1.85mm
Outer Conductor: Passivated SUS303 stainless steel
Dielectric: CPS
Inner Conductor: Gold plated beryllium copper

How To Order


FA5V-MM - 1.35mm (m) to 1.85mm (m), Outline A
FA5V-MF - 1.35mm (m) to 1.85mm (f), Outline B
FA5V-FM - 1.35mm (f) to 1.85mm (m), Outline C
FA5V-FF - 1.35mm (f) to 1.85mm (f), Outline D

Customization is available upon request.

Environmental

Temperature: -55~+85°C

Outline Drawings

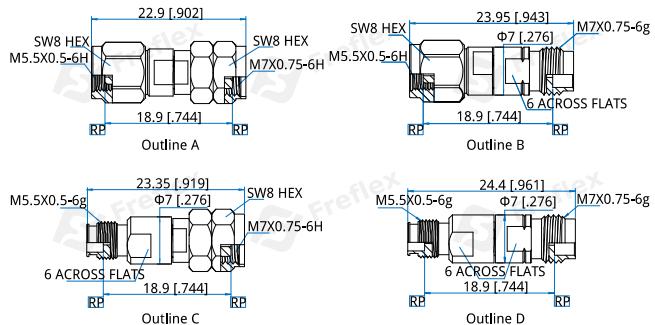

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]