

FAA6A1

3-1/8" (IF110) to 1-5/8" (IF70)

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~3GHz
VSWR:	1.07@DC~1000MHz max.
Dielectric Withstanding Voltage:	6000V RMS, 50Hz, at sea level, min.
Working Voltage:	2100V RMS, 50Hz, at sea level, max. (Outline A) 3000V RMS, 50Hz, at sea level, max. (Outline B)
Impedance of Dielectric:	5000MΩ min.
Impedance of Contact (Center):	1.5mΩ max.
Impedance of Contact (Outer):	1.5mΩ max.
Average Power:	3.4KW@900MHz
Peak Power:	90KW max. (Outline A) 20KW max. (Outline B)
Impedance:	50Ω

Mechanical

RF Connectors:	3-1/8" (IF110) 1-5/8" (IF70)
Mating Life Cycle:	100 cycles min.
ROHS Compliant:	Full ROHS compliance
Outer Conductor:	Nickel plated brass
Dielectric:	PTFE
Inner Conductor:	Silver plated brass
Waterproof:	With O-Ring

Environmental

Temperature:	-45~+85°C
--------------	-----------


How To Order

FAA6A1 - 3-1/8" to 1-5/8", Outline A

FAA6A1R - 3-1/8" to 1-5/8" right angle, Outline B

Customization is available upon request.

Outline Drawings

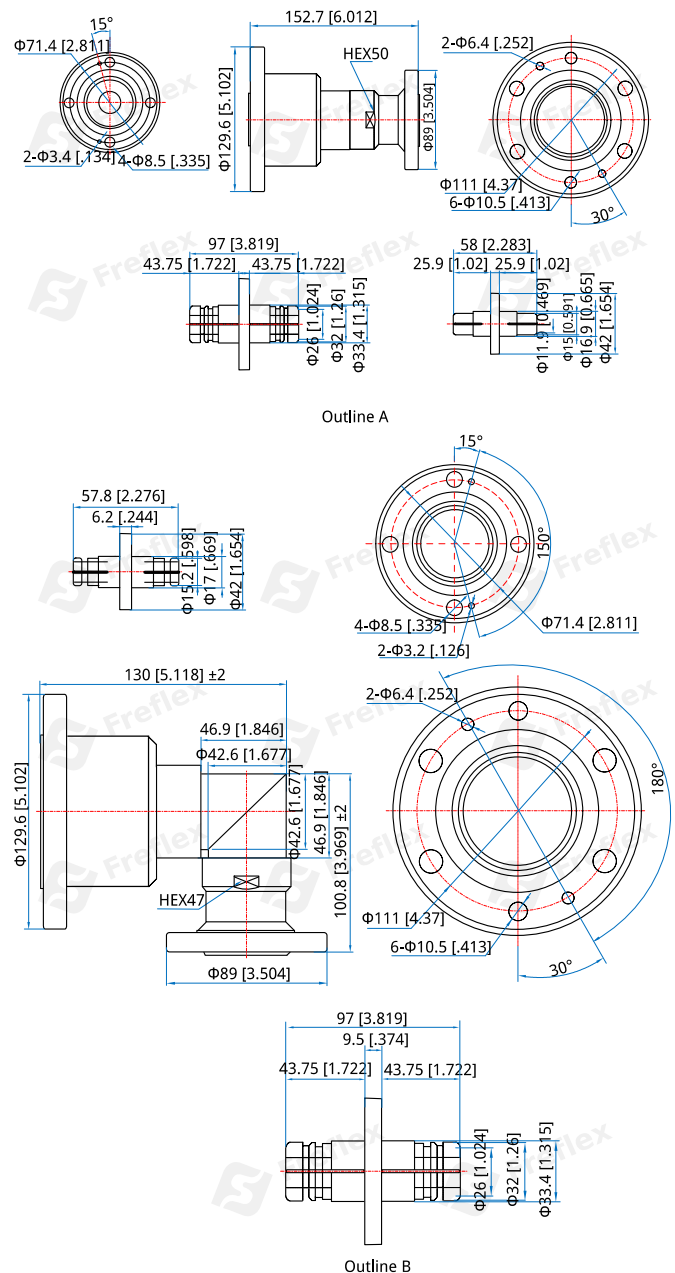

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]