

## FAA6LC

### 3-1/8" (IF110) to LC

#### Features:

- \* Low VSWR

#### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

#### Electrical

Frequency:	DC~3GHz
VSWR:	1.07@DC~1000MHz max. 1.15@DC~1000~2500MHz max.
Dielectric Withstanding Voltage:	6000V RMS, 50Hz, at sea level, min.
Impedance of Dielectric:	5000MΩ min.
Impedance of Contact (Center):	1.5mΩ max.
Impedance of Contact (Outer):	1.5mΩ max.
Average Power:	2.3KW@900MHz
Peak Power:	90KW max.
Impedance:	50Ω

#### Mechanical

RF Connectors:	3-1/8" (IF110) LC
Mating Life Cycle:	100 cycles min.
ROHS Compliant:	Full ROHS compliance
Outer Conductor:	Nickel plated brass
Dielectric:	PTFE
Inner Conductor:	Silver plated brass

#### Environmental

Temperature: -55~+85°C


#### How To Order

**FAA6LC-M** - 3-1/8" to LC (m), Outline A


**FAA6LC-F** - 3-1/8" to LC (f), Outline B

Customization is available upon request.

#### Outline Drawings

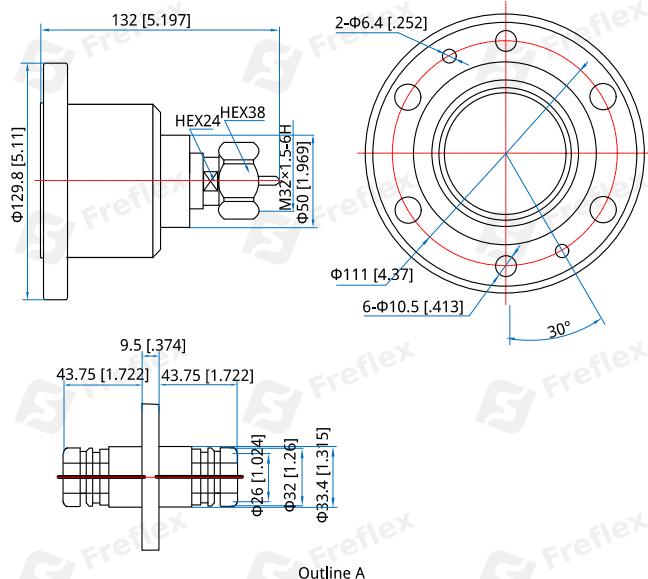

Outline A

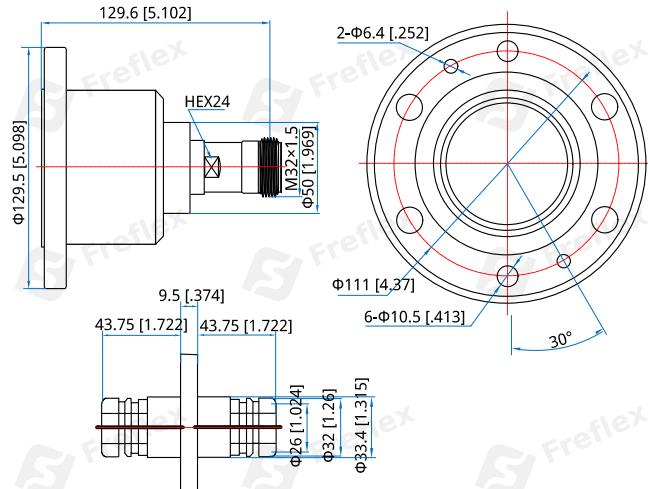

Outline B

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]