

FABS1

BNC to SHV

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

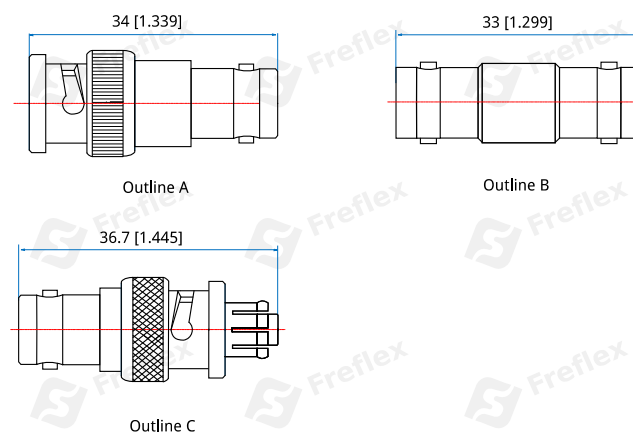
Frequency:	DC~0.3GHz
Dielectric Withstanding Voltage:	1500V RMS, 50Hz, at sea level, min.
Impedance of Dielectric:	5000MΩ min.
Impedance of Contact (Center):	2mΩ max.
Impedance of Contact (Outer):	1mΩ max.
Impedance:	50Ω

Mechanical

RF Connectors:	BNC SHV
Mating Life Cycle:	500 cycles min.
Outer Conductor:	Nickel plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

Environmental

Temperature:	-45~+125°C
--------------	------------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order
FABS1-MM - BNC (m) to SHV (m), Outline A

FABS1-FM - BNC (f) to SHV (m), Outline B

FABS1-FF - BNC (f) to SHV (f), Outline C

Customization is available upon request.