

FAKJ

2.92mm to 7.0mm

Features:

* Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

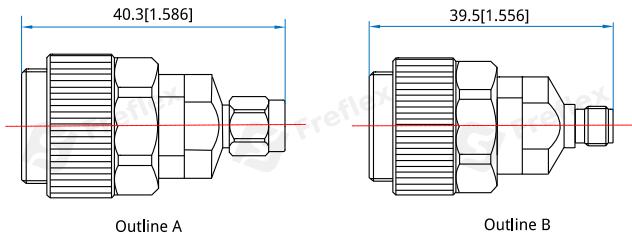
Frequency: DC~18GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical

RF Connectors: 2.92mm
7.0mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order**FAKJ-M** - 2.92mm(m) to 7.0mm, Outline A**FAKJ-F** - 2.92mm(f) to 7.0mm, Outline B

Customization is available upon request.