

## FAL2L2

### L12 to L12

#### Features:

- \* Low VSWR

#### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

#### Electrical

Frequency: DC~6GHz  
 VSWR: 1.2 max.  
 Impedance: 50Ω


#### Mechanical

RF Connectors: L12  
 Mating Life Cycle: 500 cycles  
 Outer Conductor: Ternary alloy plated brass  
 Dielectric: PTFE  
 Inner Conductor: Gold plated beryllium copper

#### Environmental

Temperature -55~+165°C

#### Outline Drawings

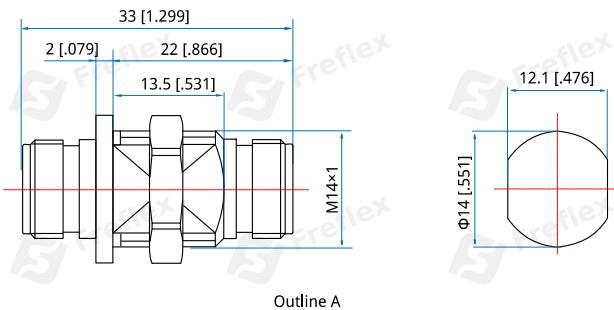

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

#### How To Order

**FAL2L2H-FF** - L12(f) to L12 (f), Flange mount, Outline A

Customization is available upon request.