

FAM1M1

NMD 1.0mm to NMD 1.0mm

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: DC~110GHz
 VSWR: 1.35 max.
 Impedance: 50Ω

Mechanical

RF Connectors: NMD 1.0mm
 Mating Life Cycle: 500 cycles min.
 Outer Conductor: Gold plated beryllium copper & Passivated SUS303 stainless steel
 Dielectric: CPS
 Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+85°C

How To Order


FAM1M1-MM - NMD 1.0mm (m) to NMD 1.0mm (m), Outline A

FAM1M1-FF - NMD 1.0mm (f) to NMD 1.0mm (f), Outline B

FAM1M1-MF - NMD 1.0mm(m) to NMD 1.0mm(f), Outline C

Customization is available upon request.

Outline Drawings

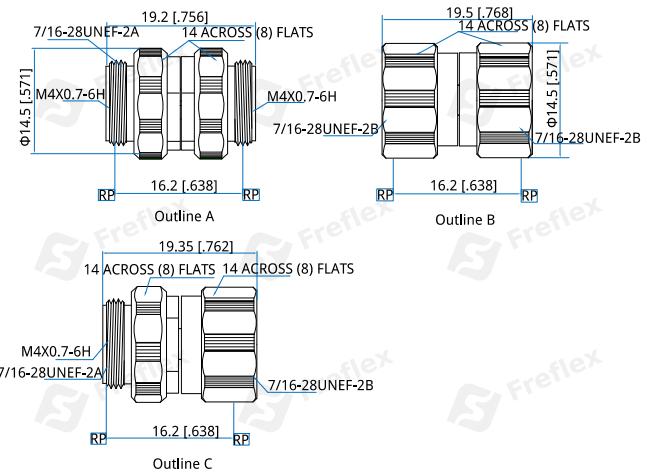

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]