

FAM2K

NMD 2.4mm to 2.92mm

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: DC~40GHz
 VSWR: 1.2 max.
 Impedance: 50Ω


Mechanical

RF Connectors: NMD 2.4mm
 2.92mm
 Mating Life Cycle: 500 cycles
 Outer Conductor: Passivated stainless steel
 Dielectric: PEI
 Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings

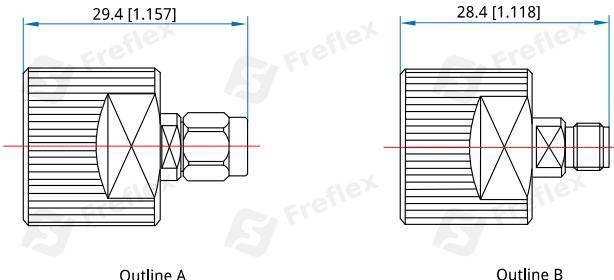

Outline A

Outline B

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FAM2K-FM - NMD 2.4mm(f) to 2.92mm(m), Outline A

FAM2K-FF - NMD 2.4mm(f) to 2.92mm(f), Outline B

Customization is available upon request.