

FAM2MK

NMD 2.4mm to NMD 2.92mm

Features:

* Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: DC~40GHz
 VSWR: 1.2 max.
 Impedance: 50Ω


Mechanical

RF Connectors: NMD 2.4mm
 NMD 2.92mm
 Mating Life Cycle: 2000 cycles max.
 Outer Conductor: Passivated SUS303 stainless steel
 Dielectric: PEEK
 Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings

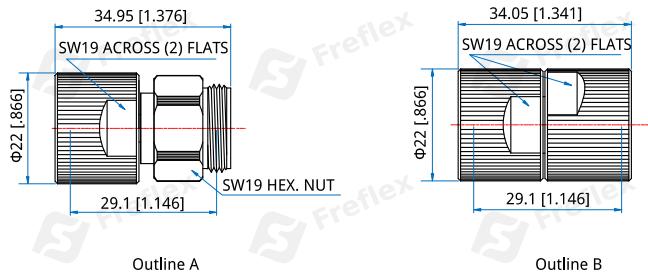

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FAM2MK-FM - NMD 2.4mm(f) to NMD 2.92mm(m), Outline A

FAM2MK-FF - NMD 2.4mm(f) to NMD 2.92mm(f), Outline B

Customization is available upon request.