

## FAM2N

### NMD 2.4mm to N

**Features:**

- \* Low VSWR

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

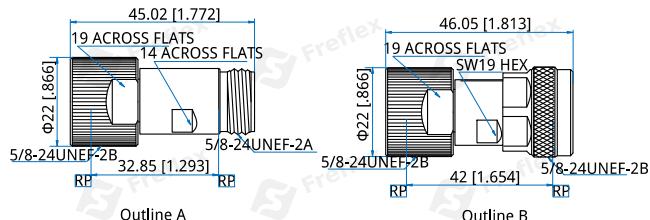
Frequency: DC~18GHz  
 VSWR: 1.15 max.  
 Impedance: 50Ω

**Mechanical**

RF Connectors: NMD 2.4mm  
 N  
 Mating Life Cycle: 2000 cycles min.  
 Outer Conductor: Passivated SUS303 stainless steel  
 Dielectric: PEI  
 Inner Conductor: Gold plated beryllium copper

**Environmental**

Temperature: -55~+165°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**FAM2N-FF** - NMD 2.4mm (f) to N (f), Outline A

**FAM2N-FM** - NMD 2.4mm(f) to N(m), Outline B

Customization is available upon request.