

## FAM2V

NMD 2.4mm to 1.85mm

### Features:

\* Low VSWR

### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency: DC~50GHz  
 VSWR: 1.25 max.  
 Impedance: 50Ω


### Mechanical

RF Connectors: NMD 2.4mm  
 1.85mm  
 Mating Life Cycle: 2000 cycles min.  
 Outer Conductor: Passivated SUS303 stainless  
 steel  
 Dielectric: PEI  
 Inner Conductor: Gold plated beryllium copper

### Environmental

Temperature: -55~+165°C

### Outline Drawings

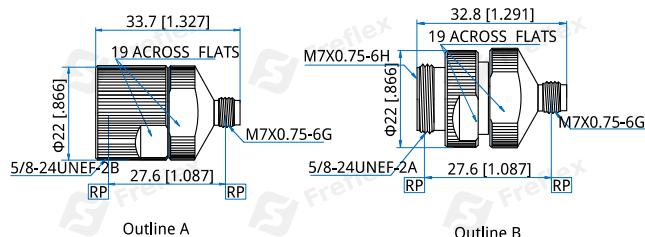

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FAM2V-FF** - NMD 2.4mm (f) to 1.85mm (f), Outline A

**FAM2V-MF** - NMD 2.4mm(m) to 1.85mm(f), Outline B

Customization is available upon request.