

FAMKV

NMD 2.92mm to 1.85mm

Features:

* Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

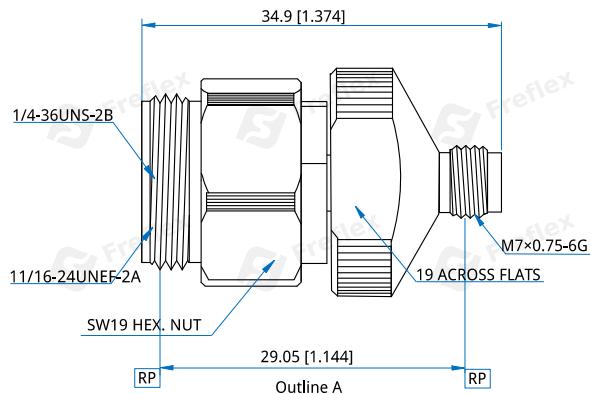
Frequency: DC~40GHz
 VSWR: 1.2 max.
 Impedance: 50Ω

Mechanical

RF Connectors: NMD 2.92mm
 1.85mm
 Mating Life Cycle: 2000 cycles min.
 Outer Conductor: Passivated SUS303 stainless
 steel
 Dielectric: PEI
 Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order
FAMKV-MF - NMD 2.92mm (m) to 1.85mm (f), Outline A

Customization is available upon request.