

**FAMV3**

NMD 1.85mm to 3.5mm

**Features:**  
\* Low VSWR**Applications:**  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar**Electrical**

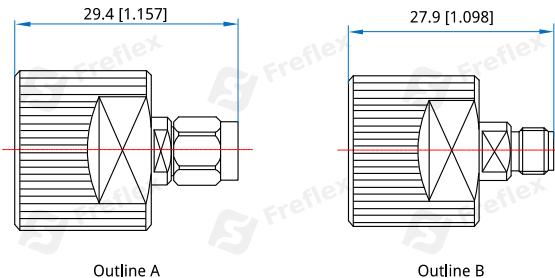
Frequency: DC~33GHz  
VSWR: 1.2 max.  
Impedance: 50Ω

**Mechanical**

RF Connectors: NMD 1.85mm  
3.5mm  
Mating Life Cycle: 500 cycles  
Outer Conductor: Passivated stainless steel  
Dielectric: PEI  
Inner Conductor: Gold plated beryllium copper

**Environmental**

Temperature: -55~+165°C

**Outline Drawings**

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order****FAMV3-FM** - NMD 1.85mm(f) to 3.5mm(m), Outline A**FAMV3-FF** - NMD 1.85mm(f) to 3.5mm(f), Outline B

Customization is available upon request.