

FAMVK

NMD 1.85mm to 2.92mm

Features:
* Low VSWR**Applications:**
* Wireless
* Transmitter
* Laboratory Test
* Radar**Electrical**

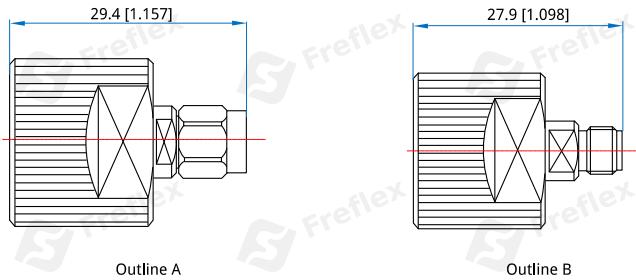
Frequency: DC~40GHz
VSWR: 1.2 max.
Impedance: 50Ω

Mechanical

RF Connectors: NMD 1.85mm
2.92mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless steel
Dielectric: PEI
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order**FAMVK-FM** - NMD 1.85mm(f) to 2.92mm(m), Outline A**FAMVK-FF** - NMD 1.85mm(f) to 2.92mm(f), Outline B

Customization is available upon request.