

FAMVMV

NMD 1.85mm to NMD 1.85mm

Features:

* Low VSWR

Applications:

* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~67GHz
VSWR: 1.35 max.
Impedance: 50Ω


Mechanical

RF Connectors: NMD 1.85mm
Mating Life Cycle: 2000 cycles max.
Outer Conductor: Passivated SUS303 stainless steel
Dielectric: PEEK
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings

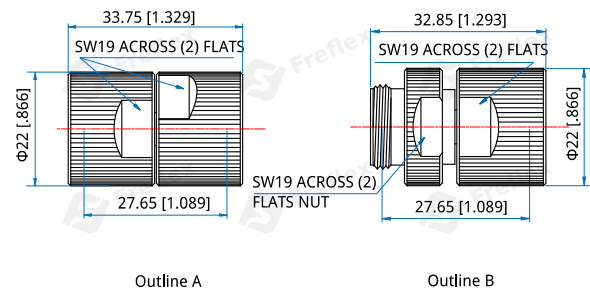

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FAMVMV-FF - NMD 1.85mm(f) to NMD 1.85mm(f), Outline A

FAMVMV-MF - NMD 1.85mm(m) to NMD 1.85mm(f), Outline B

Customization is available upon request.