

FAMVV

NMD 1.85mm to 1.85mm

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~67GHz
VSWR:	1.3 max. 1.25 max. (Outline C)
Impedance:	50Ω

Mechanical

RF Connectors:	NMD 1.85mm 1.85mm
Mating Life Cycle:	500 cycles 3000 cycles min. (Outline C)
Outer Conductor:	Passivated stainless steel Gold plated beryllium copper & Gold plated brass (Outline C)
Dielectric:	PEI CPS (Outline C)
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165°C -55~+85°C (Outline C)
--------------	-------------------------------------

How To Order


FAMVV-FM - NMD 1.85mm(f) to 1.85mm(m), Outline A

FAMVV-FF - NMD 1.85mm(f) to 1.85mm(f), Outline B

FAMVVH-MF - NMD 1.85mm(m) to 1.85mm(f), bulk head, Outline C

Customization is available upon request.

Outline Drawings

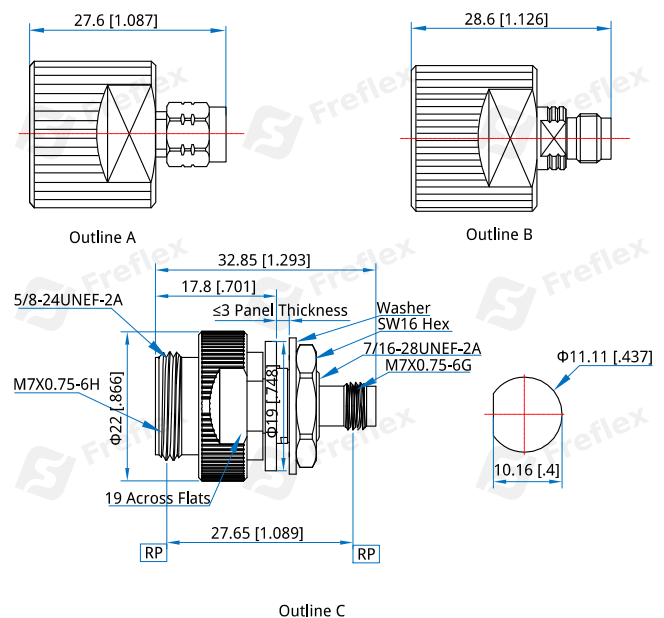

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]