

FANN1

N to Quick N

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~18GHz
VSWR:	1.2 max.
Dielectric Withstanding Voltage:	1000V
Impedance of Dielectric:	5000MΩ min.
Impedance:	50Ω


Mechanical

RF Connectors:	N
	Quick N
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings

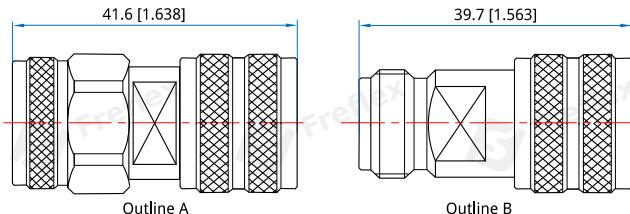

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FANN1-MM - N(m) to Quick N(m), Outline A

FANN1-FM - N(f) to Quick N(m), Outline B

Customization is available upon request.