

FANNEX

N to NEX10

Features:

* Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: DC~6GHz
 VSWR: 1.1 max.(DC~3GHz)
 Impedance: 50Ω

Mechanical

RF Connectors: N
 NEX10
 Outer Conductor: Ternary alloy plated brass
 Dielectric: PTFE
 Inner Conductor: Silver plated beryllium copper

Environmental


Temperature: -55~+85°C

How To Order

FANNEX-MF - N(m) to NEX10(f), Outline A

Customization is available upon request.

Outline Drawings

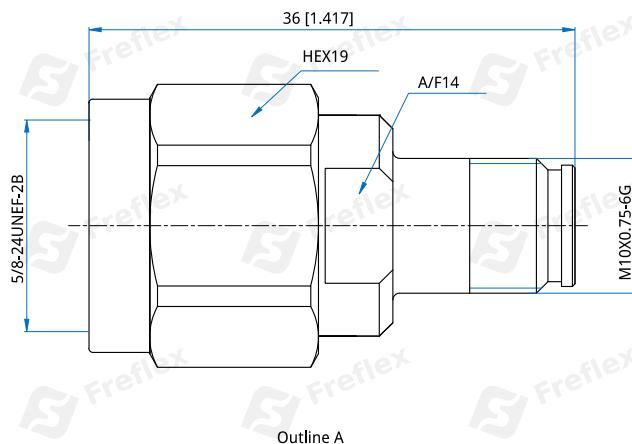

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]