

## FAS4

### SMA to 4.3/10

**Features:**

- \* Low VSWR

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency: DC~6GHz  
 VSWR: 1.15 max. @DC~3GHz  
 Impedance: 50Ω

**Mechanical**

RF Connectors: SMA  
 4.3/10  
 Outer Conductor: Silver plated phosphor bronze  
 Dielectric: PTFE  
 Inner Conductor: Silver plated phosphor bronze  
 Silver plated brass/beryllium  
 copper

**How To Order**

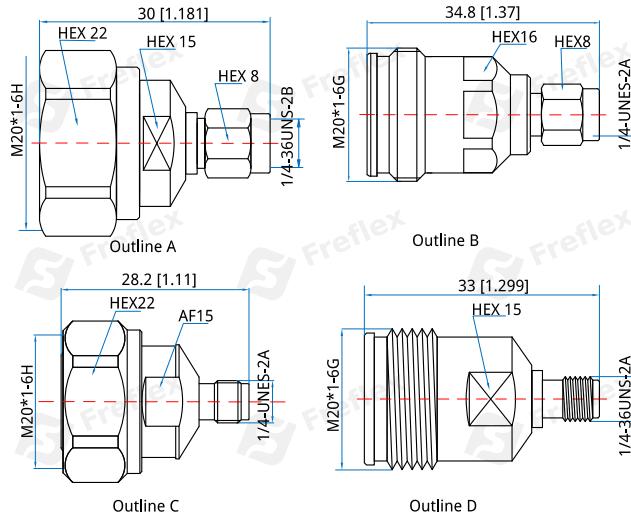
**FAS4-MM** - SMA(m) to 4.3-10(m), Outline A

**FAS4-MF** - SMA(m) to 4.3-10(f), Outline B

**FAS4-FM** - SMA(f) to 4.3-10(m), Outline C

**FAS4-FF** - SMA(f) to 4.3-10(f), Outline D

Customization is available upon request.

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]