

FASB-B SMA to BNC

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~3GHz (Outline E)
DC~4GHz (Outline F, G)
DC~6GHz
VSWR: 1.15 max. (Outline F, G)
1.25 max. (Outline E)
1.35 max.
Impedance: 50Ω

Mechanical

RF Connectors: SMA
BNC
Outer Conductor: Nickel plated brass
Dielectric: PTFE
Inner Conductor: Gold plated brass or gold
plated phosphor copper

Environmental

Operating Temperature: -55~+155°C

How To Order

FASB-MM-B - SMA(m) to BNC(m), Outline A

FASB-FM-B - SMA(f) to BNC(m), Outline B

FASB-MF-B - SMA(m) to BNC(f), Outline C

FASB-FF-B - SMA(f) to BNC(f), Outline D






FASBH-FF-B - SMA(f) to BNC(f) bulk head, Outline E

FASBH-FF-B-1 - SMA(f) to BNC(f) bulk head, Outline F

FASBL-FF-B - SMA(f) to BNC(f) flange mount, Outline G

Customization is available upon request.

Outline Drawings

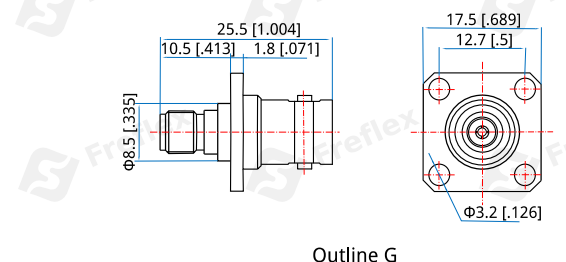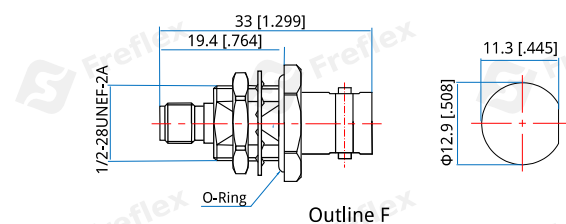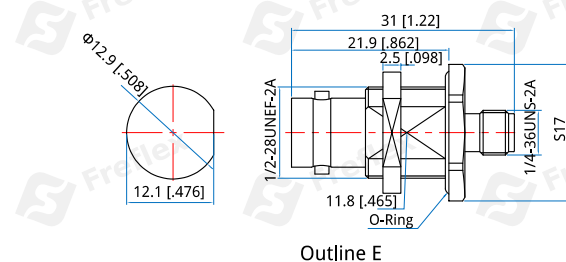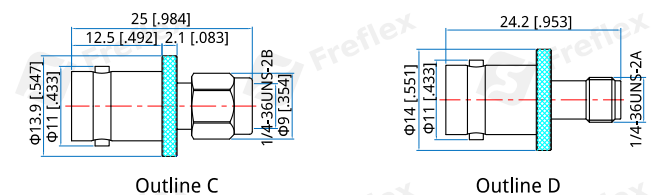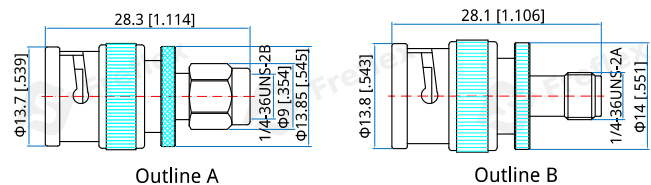

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]