

FASD

SMA to SMB

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency:	DC~4GHz
VSWR:	1.2 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC 500V DC (Outline D)
Impedance:	50Ω

Mechanical

RF Connectors:	SMA SMB
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

Environmental

Temperature:	-55~+165°C
--------------	------------

How To Order

FASD-MM - SMA(m) to SMB(m), Outline A


FASD-MF - SMA(m) to SMB(f), Outline B

FASD-FM - SMA(f) to SMB(m), Outline C

FASD-FF - SMA(f) to SMB(f), Outline D

Customization is available upon request.

Outline Drawings

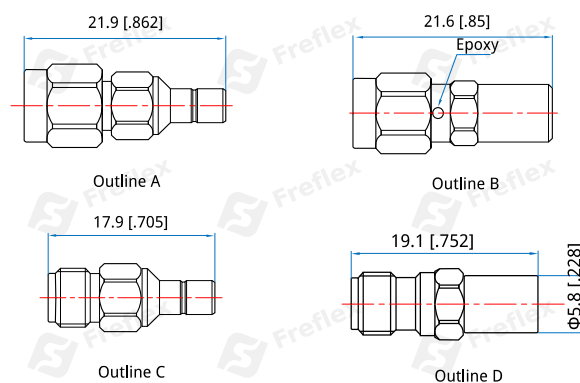

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]