

FASM SMA to MCX

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency:	DC~6GHz
VSWR:	1.2 max.
Impedance of Dielectric:	5000MΩ min.
Dielectric Withstanding	1000V
Voltage:	
Impedance:	50Ω

Mechanical

RF Connectors:	SMA
	MCX
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165°C
--------------	------------

How To Order

FASM-MM - SMA(m) to MCX(m), Outline A

FASM-MF - SMA(m) to MCX(f), Outline B


FASM-FM - SMA(f) to MCX(m), Outline C

FASM-FF - SMA(f) to MCX(f), Outline D

FASM-FF-1 - SMA(f) to MCX(f), Outline E

Customization is available upon request.

Outline Drawings

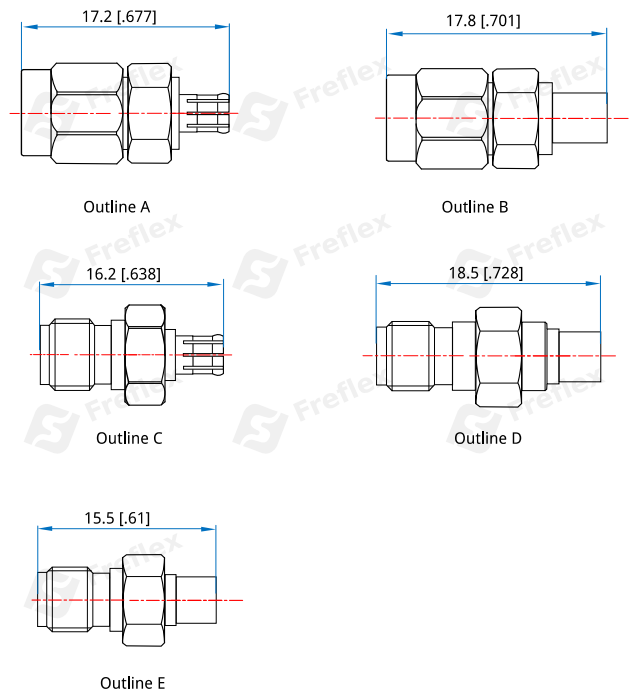

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]