

FASN-B

SMA to N

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: DC~18GHz
 VSWR: 1.2 max.
 Impedance: 50Ω

Mechanical

RF Connectors: SMA
 N
 Mating Life Cycle: 500 cycles
 Outer Conductor: Nickel plated brass
 Dielectric: PEI&PTFE
 Inner Conductor: Gold plated brass or gold plated phosphor bronze

Environmental


Temperature: -50~+85°C

How To Order

FASN-MM-B - SMA (m) to N (m), Outline A
FASN-MF-B - SMA (m) to N (f), Outline B
FASN-FM-B - SMA (f) to N (m), Outline C
FASN-FF-B - SMA (f) to N (f), Outline D
FASNL-FF-B - SMA (f) to N (f) flange mount, Outline E

Customization is available upon request.

Outline Drawings

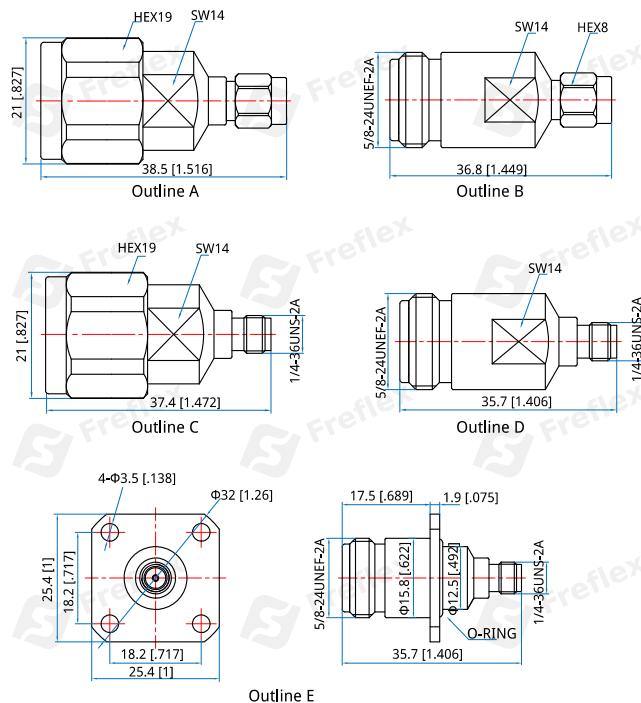

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]