

FASQS-B

SMA to Quick SMA

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC
Impedance:	50Ω

Mechanical

RF Connectors:	SMA
	Quick SMA
Outer Conductor:	Gold plated brass or Gold plated beryllium copper
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper


How To Order

FASQS-FM-B - SMA (f) to Quick SMA (m), Outline A

FASQSL-FM-B - SMA (f) to Quick SMA (m), flange mount, Outline B

Customization is available upon request.

Outline Drawings

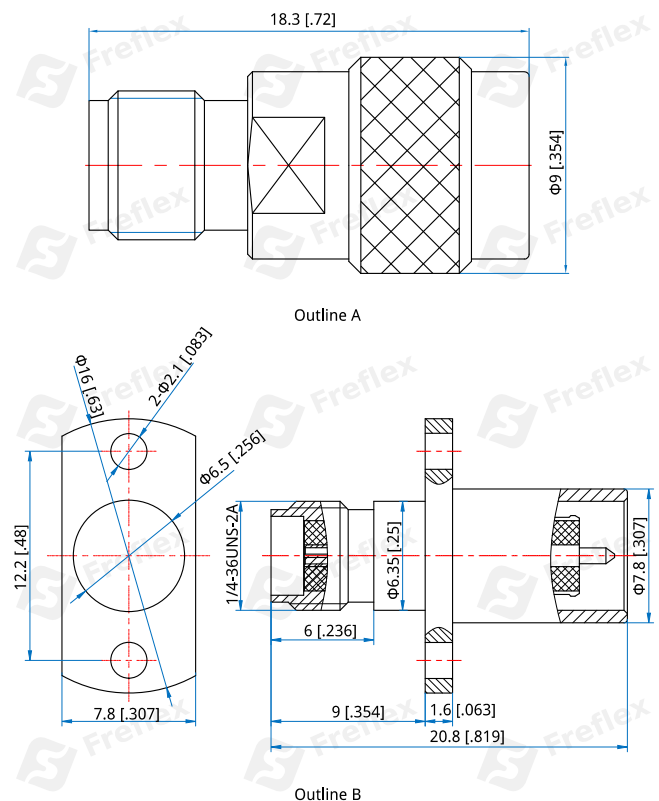

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]