

FASW

SMA to SSMC

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~17GHz
VSWR:	1.25 max.@17GHz 1.15 max.@DC~6GHz
Impedance:	50Ω


Mechanical

RF Connectors:	SMA
	SSMC
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold Plated Brass
Dielectric:	PTFE
Inner Conductor:	Gold Plated Phosphor Copper

Environmental

Temperature: -45~+125°C

Outline Drawings

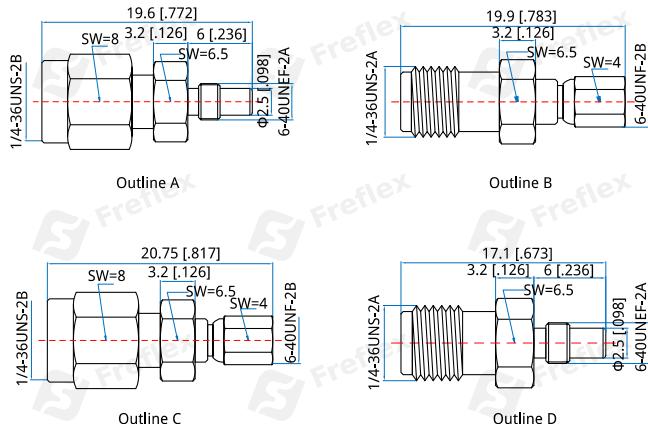

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FASW-MM - SMA(m) to SSMC(m), Outline A

FASW-FF - SMA(f) to SSMC(f), Outline B

FASW-MF - SMA(m) to SSMC(f), Outline C

FASW-FM - SMA(f) to SSMC(m), Outline D

Customization is available upon request.