

## FMS2S-22-2

### DC~22GHz, SPDT

#### Features:

- \* High Power
- \* Long Operation Life

#### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

#### Electrical

Frequency:	DC~22GHz
VSWR:	1.5 max.
Insertion Loss:	0.5dB max.
Isolation:	50dB min.
Average Power:	50W
Impedance:	50Ω

#### Mechanical


Size <sup>*1</sup> :	34*22.05*13.2mm 1.339*0.868*0.52in
Switching Sequence:	Break before Make
Operation Life:	1M Cycles
RF Connectors:	SMA Female
Power Supply & Control	Manual
Interface Connectors:	
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

#### Environmental

Operating Temperature:	-25~+65°C
Non-Operating Temperature:	-55~+85°C

#### Outline Drawings

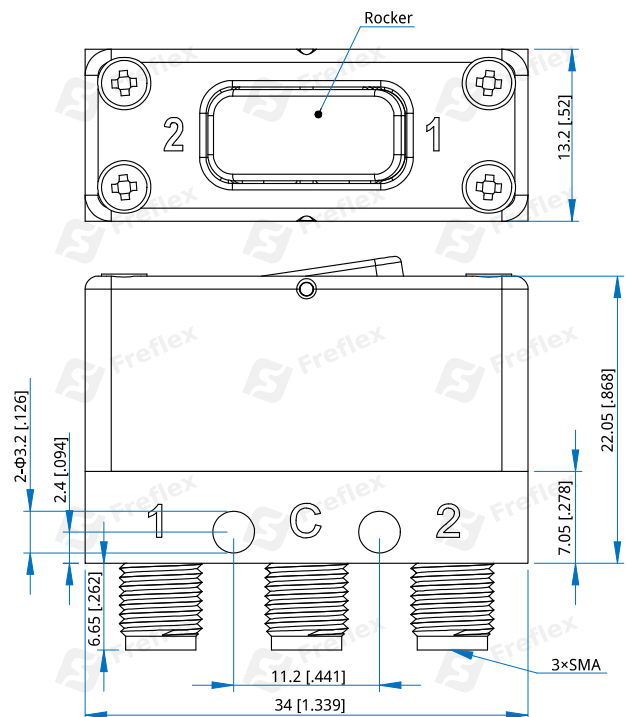

Unit: mm [in]

Tolerance: ±0.5mm [±0.012in]

#### How To Order

**FMS2S-22-2**

Customization is available upon request.