

FMSD3SH

DC~26.5GHz, 2P3T

Features:

- * Low VSWR
- * Low Insertion Loss
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: DC~26.5GHz
Impedance: 50Ω

Model	Frequency range (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR
FMSD3SH-18	DC-6	0.20	70	1.2
	6-18	0.40	55	1.3
FMSD3SH-26.5	DC-18	0.40	70	1.3
	18-26.5	0.45	55	1.4

Voltage*1 (V)	12	24	28
Current (mA)	Failsafe	350	200
	Latching	400	200

[1] The voltage can be selected according to user requirements.

Mechanical


Size*2:	38.7*53.2*13.2mm 1.524*2.094*0.52in
Switching Sequence:	Break before Make
Switching Time:	15mS max.
Operation Life:	2M Cycles
Vibration (operating):	20-2000Hz, 10G RMS
Mechanical Shock (non-operating):	30G, 1/2sine, 11mS
RF Connectors:	SMA Female
Power Supply & Control Interface Connectors:	Feed Through/Terminal Post
Mounting:	2-Φ3mm through-hole
	2-Φ2mm through-hole

[2] Exclude connectors.

Environmental

Temperature:	-25~+65°C
Extended Temperature:	-45~+85°C

Outline Drawings

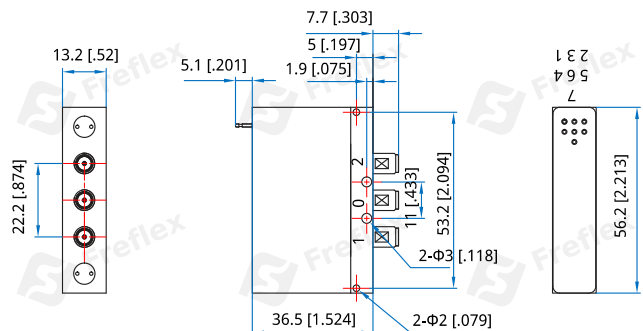

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Additional Options

TTL: T
Indicators: I
Extended Temperature: Z
Positive Common
Waterproof Sealing Type

How To Order

FMSD3SH-F-WXYZ

F: Frequency in GHz
W: Actuator Type. Failsafe: 0, Latching: 1.
X: Voltage. +12V: E, +24V: K, +28V: M.
Y: Power Interface. Pin: 0
Z: Additional Options.

Examples:

To order a 2P3T switch, High performance, DC-18GHz, Failsafe, +12V, D-Sub, TTL, Indicators, specify FMSD3SH-18-0E1TI.

Customization is available upon request.

Pin Numbering

Failsafe

Pin	Function	Pin	Function
1	VDC(RF: 2 to 3,4 to 5)	4~5	Indicator (1~2)
2	NC	6	Indicator (COM)
3	COM(RF: 2 to 3,4 to 5)	7~9	NC

Failsafe&TTL

Pin	Function	Pin	Function
1	VDC(RF: 2 to 3,4 to 5)	4~5	Indicator (1~2)
2	A1(RF: 2 to 3,4 to 5)	6	Indicator (COM)
3	COM(RF: 2 to 3,4 to 5)	7~9	NC

Latching

Pin	Function	Pin	Function
1	VDC(RF: 1 to 2,3 to 4)	4~5	Indicator (1~2)
2	VDC(RF: 2 to 3,4 to 5)	6	Indicator (COM)
3	COM	7~9	NC

Latching&TTL

Pin	Function	Pin	Function
1	VDC	4	A2(RF: 2 to 3,4 to 5)
2	A1(RF: 1 to 2,3 to 4)	5~6	Indicator (1~2)
3	COM	7	Indicator (COM)

Driving Schematic Diagram

