

## FCLF-11-40

DC~11MHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

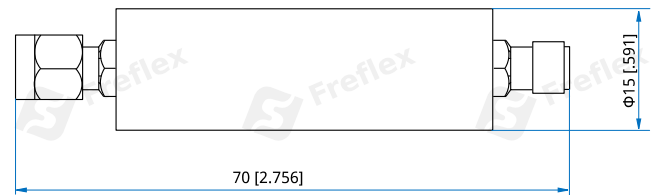
Frequency:	DC~11MHz
Insertion Loss:	1dB
VSWR:	1.45
Stop Band Attenuation:	40dB@23~200MHz
Impedance:	50Ω

**Mechanical**

Size:	70*Φ15mm
	2.756*Φ0.591in
RF Connectors:	SMA
Cavity:	Gold plated copper
Weight:	50g max.

**Environmental**

Operating Temperature:	4K (-269.15°C)
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: .x±1mm [±0.039in]

**How To Order**
**FCLF-11-40**

Customization is available upon request.