

## FCLF-500-25

DC~0.5GHz, 25dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Frequency:	DC~0.5GHz
Insertion Loss:	0.5dB
VSWR:	1.45
Stop Band Attenuation:	25dB@2.7~15GHz
Impedance:	50Ω


### Mechanical

Size:	66.9*Φ9.8mm
	2.634*Φ0.386in
RF Connectors:	SMA
Cavity:	Gold plated copper
Weight:	50g max.

### Environmental

Operating Temperature:	4K (-269.15°C)
Non-operating Temperature:	-55~+85°C

### Outline Drawings

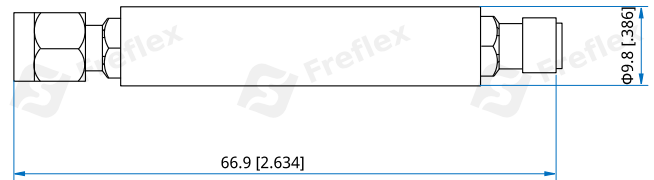

Unit: mm [in]

Tolerance: .x±1mm [±0.039in]

### How To Order

**FCLF-500-25**

Customization is available upon request.