

FDB-10-18000-K2-SFSF

0.01~18GHz

Features:

- * Broadband
- * Low VSWR

Applications:

- * Telecom
- * Instrumentation
- * Laboratory Test
- * Radar

Electrical


Frequency Range:	0.01~18GHz
Insertion Loss:	1.2dB max.
VSWR:	1.35 typ.
Impedance:	50Ω
Voltage:	200V DC max.

Mechanical

Size ^{*1} :	12*10*10mm 0.472*0.394*0.394in
Connectors:	SMA female
Material:	Gold plated brass
Type:	Inner

[1] Exclude connectors.

Outline Drawings

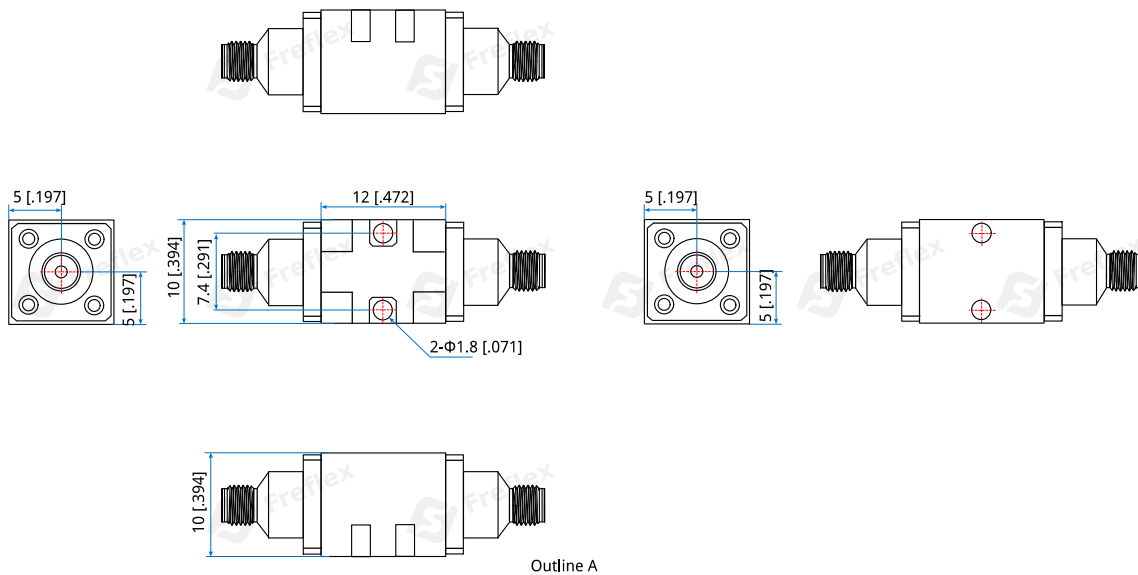

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FDB-10-18000-K2-SFSF - SMA female, SMA female, Outline A

Customization is available upon request.