

FWD-6

WR-6, 110~170GHz

Features:

- * Broadband
- * High Sensitivity

Applications:

- * Telecom
- * Instrumentation
- * Laboratory Test
- * Radar


Electrical

Frequency Range:	110~170GHz
Sensitivity:	2500V/W typ.
VSWR:	2 typ.
Polarity:	Positive
Input Power Without Damage:	+10dBm typ.
Input Dynamic Range:	-20dBm min.
Impedance:	50Ω

Mechanical

Size:	25*20*20mm
	0.984*0.787*0.787in
Input Connector:	WR-6
Output Connector:	SMA Female

Outline Drawings

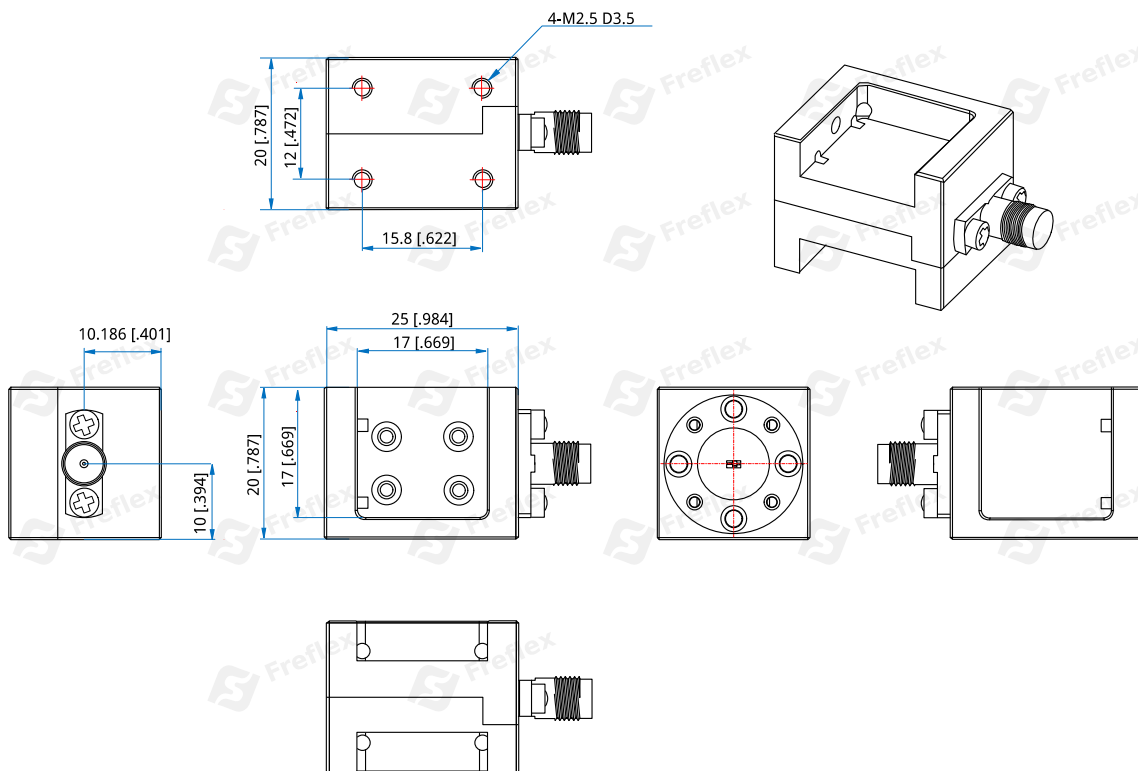

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FWD-6

Customization is available upon request.