

## FDDC-0.004-400-K12-40-S

0.004~400MHz, 120W

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	0.004~400MHz
Insertion Loss:	0.8dB max.
Coupling:	40±2dB
Directivity:	12dB min.
Coupling Flatness:	±2dB max.
VSWR (Mainline):	1.35 max.
Average Power:	120W
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	50.8*50.8*22.35mm 2*2*0.88in
Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

### Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

### Outline Drawings

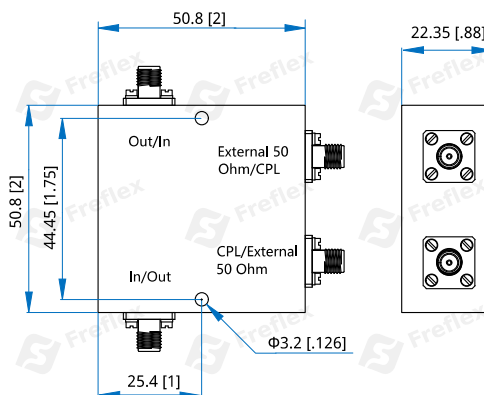

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**FDDC-0.004-400-K12-40-S**

Customization is available upon request.