

FDDC-0.004-400-K5-50-NS

4KHz~400MHz, 500W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	4KHz~400MHz
Coupling:	50±1dB
Coupling Flatness:	±0.6dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.4dB max.
Directivity:	20dB min.
Power Handling:	500W

Mechanical

Size ^{*1} :	152.4*55.9*55.9mm 6*2.201*2.201in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M3-6H-D8mm through-hole

[1] Exclude connectors

Outline Drawings

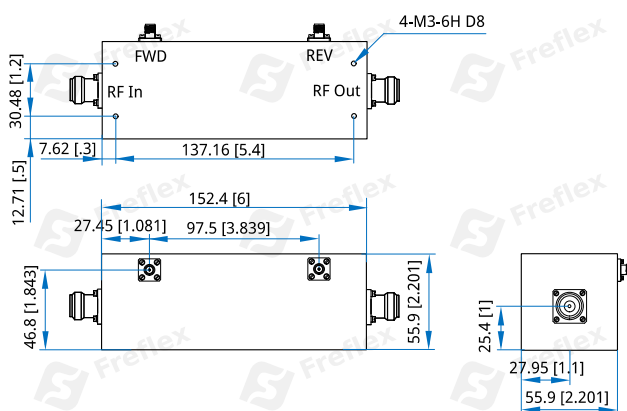

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FDDC-0.004-400-K5-50-NS

Customization is available upon request.