

FDDC-0.009-260-K2-40-NS

9KHz~260MHz, 200W, 40dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	9KHz~260MHz
Coupling:	40±1.5dB
Coupling Flatness:	±0.5dB max.
VSWR(Mainline):	1.2 max.
VSWR(Coupline):	1.3 max.
Insertion Loss:	0.3dB max.
Directivity:	14dB min. @9-20KHz 18dB min. @20KHz-260MHz
Average Power:	200W CW

Mechanical


Size ^{*1} :	152.4*55.9*55.9mm 6*2.201*2.201in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M3mm-H6 D8

[1] Exclude connectors

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

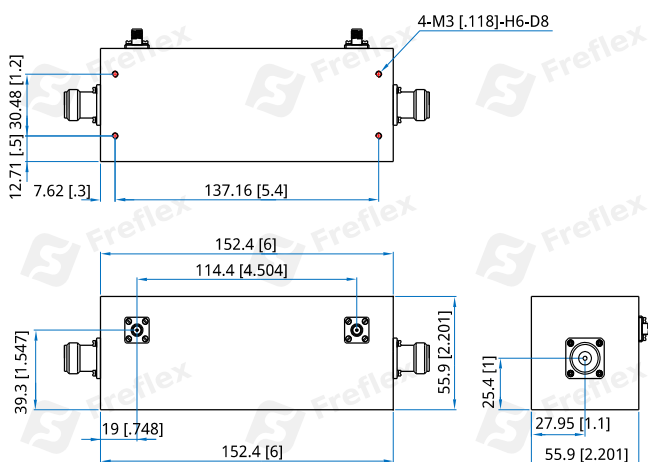

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FDDC-0.009-260-K2-40-NS

Customization is available upon request.