

FDDC-0.01-100-10K-60-A1N

0.01~100MHz, 10KW, 60dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.01~100MHz
Coupling:	60±1dB
Coupling Flatness:	±1dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.2dB max.
Directivity:	20dB min.
Power Handling:	10KW

Mechanical

Size ^{*1} :	300*100*100mm 11.811*3.937*3.937in
RF Connectors:	1-5/8" (IF70)
Coupling Connectors:	N female
Mounting:	4-M5-D10mm through-hole

[1] Exclude connectors

Outline Drawings

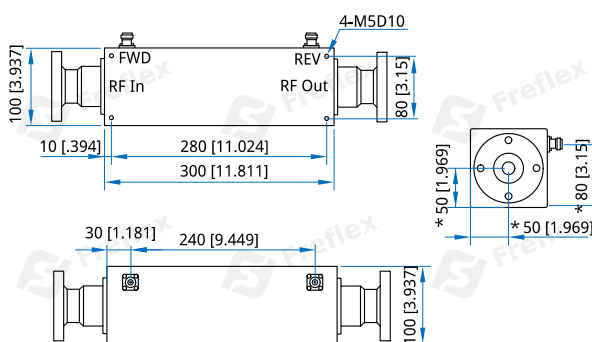

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FDDC-0.01-100-10K-60-A1N

Customization is available upon request.